



DATASHEET



A delineator, clearly marking the edge of the taxiways and roads. For the day and night marking of taxiways a vertical Blue Linlaner 375mm Post and 250mm Blue Retroreflective Sheath is necessary to comply with ICAO requirements.



Note: Slip on Retroreflective Sheaths, Ground Fixing Pipes and the Auger are accessories, only for sale with the appropriate numbers of Richmark Linlaners, and are not sold for use with non-Richmark products.

Compliance

- ICAO Annexe 14. Chapter 5 para 5.5.5 and Cap168 on colours.
- FAA – L/853 type 2 specification AC150/5345-B39

Features

- Specification: ICAO and CAP 168 recommendations on size and colours.
- Highly visible, flexible, and safe in the event of run-down.
- Installation 30 metres centres on straights and 7 metres on curves using the Ground Fixing Pipe and Auger.
- Internationally approved and used by Commercial and Military users.
- Complies with ICAO Annexe 14 chapter 5 and CAP 168, on colours.
- UV Stabilised, will not degrade.

Types

- 375mm Base requires 250mm coloured sheath.
- 740mm base requires 375mm coloured sheath.
(Supplied separately).

Installation

We strongly recommend using the LLGFP (Linlaner Ground Fitting Pipe) for installation of the Linlaners.

The LLGFP can be placed in the pavement (concrete) as well as directly in the soft ground around the airfield.

When placed in the earth/ground, the ground should ideally be compacted or firm. We recommend using the Parkinson Richmark Auger to make the hole in the ground for the LLGFP.

The hole in the pavement or ground should be cored 57-59mm in diameter and be at least 130mm deep to accommodate the LLGFP.

Accessories

Ground Mounting Kit



Hole Cutter (Auger)



Dimensions:

340 x 110 x 200mm


| Model | Height | Colour | Height of Sheath | Total Reflective Surface |
|--------------------------|--------|------------|------------------|-----------------------------|
| Linlaner 255 ICAO | 255mm | Blue | 250mm | 60,000 mm ² (1) |
| Linlaner 375 ICAO | 375mm | Blue | 250mm | 60,000 mm ² (1) |
| Linlaner 375 FAA/ICAO | 375mm | Blue/White | 250mm | 90,000 mm ² (2) |
| Linlaner 750 FAA/ICAO | 375mm | Blue/White | 750mm | 180,000 mm ² (3) |

(1) 1 x 250mm Sheath

(2) 1 x 250mm Sheath plus another 125mm

(3) A combination of 250mm and 125mm Sheaths to cover the 750mm

Dimensions

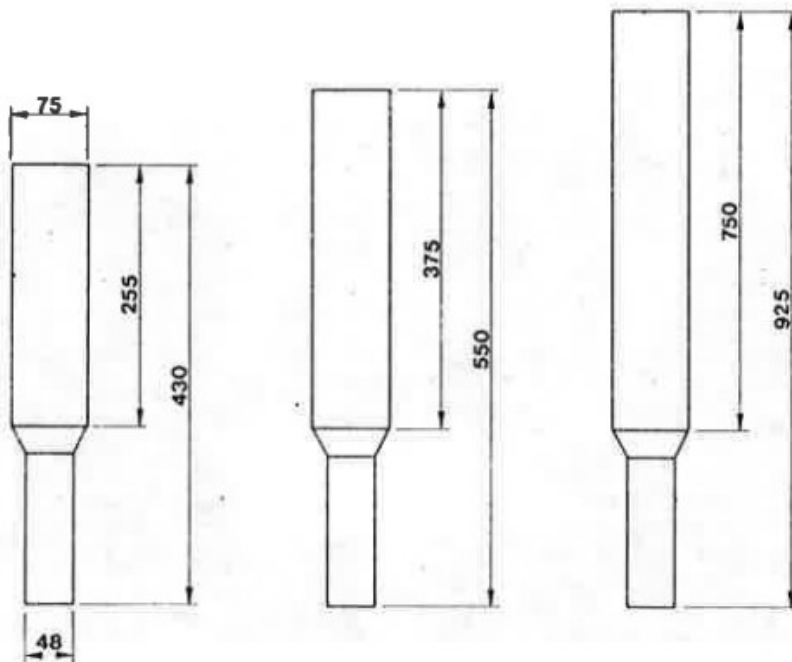

Packing Details

Linlaners 255 x 15 pieces

Linlaner 375, Linlaner 750, Sheaths, Ground Kits all x 10 pieces