



A delineator, clearly marking the edge of the taxiways and roads. For the day and night marking of taxiways a vertical Blue Linlaner 375mm Post and 250mm Blue Retroreflective Sheath is necessary to comply with ICAO requirements.



Coloured Retro Reflective Sheaths



Note: Slip on Retroreflective Sheaths, Ground Fixing Pipes and the Auger are accessories, only for sale with the appropriate numbers of Richmark Linlaners, and are not sold for use with non-Richmark products.

# Compliance

- ICAO Annexe 14. Chapter 5 para 5.5.5 and Cap168 on colours.
- FAA L/853 type 2 specification AC150/5345-B39

#### **Features**

- Specification: ICAO and CAP 168 recommendations on size and colours.
- Highly visible, flexible, and safe in the event of run-down.
- Installation 30 metres centres on straights and 7 metres on curves using the Ground Fixing Pipe and Auger.
- Internationally approved and used by Commercial and Military users.
- Complies with ICAO Annexe 14 chapter 5, and CAP 168 on colours.
- UV Stabilised, will not degrade.

## **Types**

- 375mm Post requires 250mm coloured sheath.
- 750mm Post requires 375mm coloured sheath. (Supplied separately).

#### Installation

We strongly recommend using the LLGFP (Linlaner Ground Fitting Pipe) for installation of the Linlaners. The LLGFP can be placed in the pavement (concrete) as well as directly in the soft ground around the airfield. When placed in the earth/ground, the ground should ideally be compacted or firm. We recommend using the Parkinson Richmark Auger to make the hole in the ground for the LLGFP. The hole in the pavement or ground should be cored 57-59mm in diameter and be at least 130mm deep to accommodate the LLGFP.



### **Accessories**

LLGFP Hole Cutter (Auger)



# Range

Model	Height	Height of Sheath	Total Reflective Surface	Viewing Area
Linlaner 375 ICAO	375mm	250mm	60,000 mm <sup>2 (1)</sup>	187.50 cm <sup>2</sup>
Linlaner 375 FAA	375mm	375mm	90,000 mm <sup>2 (2)</sup>	281.25 cm <sup>2</sup>
Linlaner 750	750mm	750mm	180,000 mm <sup>2 (3)</sup>	562.50 cm <sup>2</sup>

- (1) 1 x 250mm Sheath
- (2) 1 x 250mm Sheath plus another 125mm
- (3) A combination of 250mm and 125mm Sheaths to cover the 750mm

### **Available Colours Posts**

Yellow / Blue / (International) Red / White / Orange


# **Available Sheath Colours**

Yellow / Blue / Red / White / Green

(Other Post and Sheath colours available to order)



# **Dimensions**

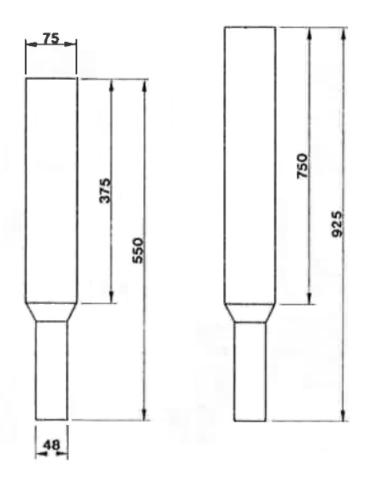

Dimensions in mm

